



stitch: Color Block Clutch Tutorial

SUPPLIES

- ¼ yard fabric for outer case - 3 pieces total (A, B, C)
- ¼ yard fabric for lining
- ½ yard lightweight interfacing
- 1 set of 18mm extra thin magnetic snap closures
- Coordinating thread
- Invisible ink marker
- Xacto knife

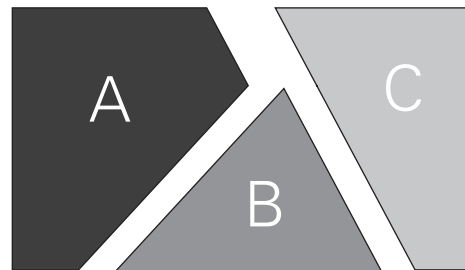


clutch front

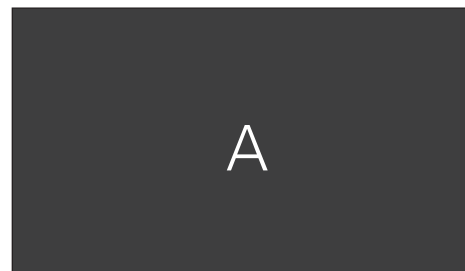


clutch back

TEMPLATE MEASUREMENTS

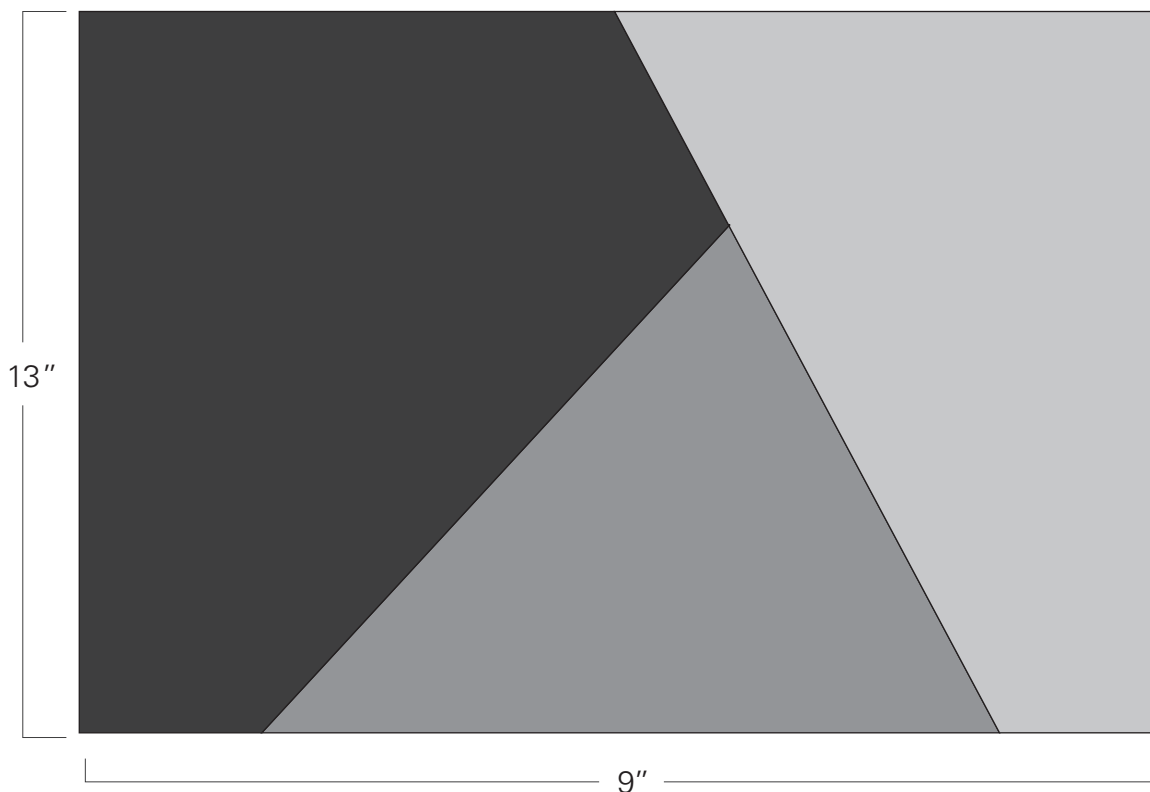


STEPS


1. Cut once piece each of the outer fabric (A,B,C) and lining based on template measurements
2. Cut four pieces of lightweight interfacing based on template measurements
3. Sew Fabric A and Fabric B together with $\frac{1}{4}$ seam. Press seam open

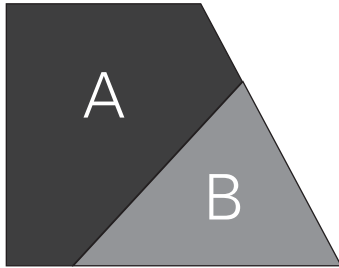


4. Sew Fabric C to A & B Block and press the seams open and then trim to final size of 13in x 9in.

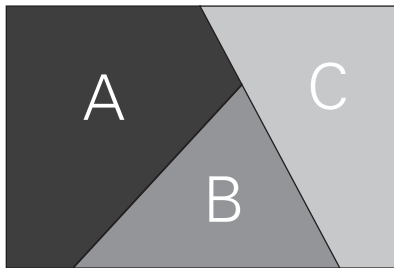


5. Fuse interfacing to wrong side of outer fabric as well as wrong side of the lining
6. Place the lining right side up and using your fabric marker, measure 1.5 inches from the top. Then place one of the back piece of the snaps at the mark you made {top of disk lined up with mark} and use it to mark where you need to cut slits for the prongs. Cut the slits open carefully with the xacto knife (see illustration below) and then place top side of magnetic snap through the slits and secure the back with the back piece of the magnetic snap.




Lining right side up with 1.5" mark

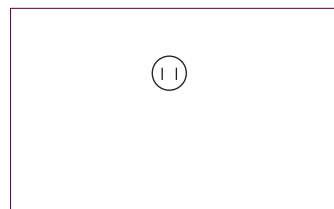


Mark back piece of magnetic snaps



Cut slits open carefully with xacto knife

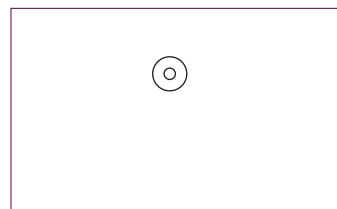


Place front side of magnetic snap through slits

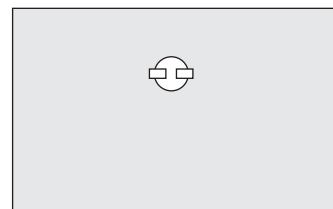


Wrong side of lining, with back side of magnetic snap secured


7. Place outer fabric right sides together and sew the sides and bottom with a 1/4 inch seam.




8. Place lining fabric right sides together and sew the sides and bottom with a 1/4 inch seam, BUT leave a 4in gap at the bottom.

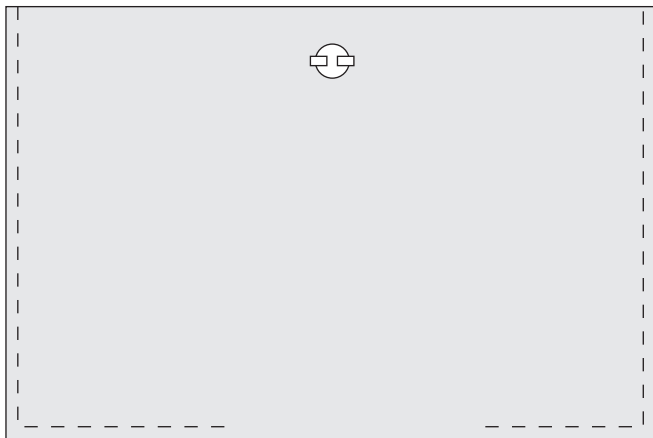

9. Turn outer fabric right side out and place it within the lining. The right sides of the outer fabric and lining are now facing each other. Sew all the way around the top edge with a 1/4 inch seam.

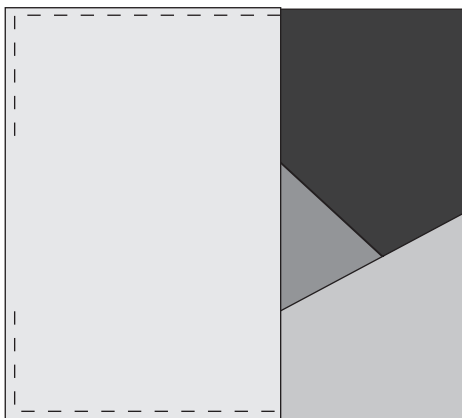


← Outer fabric is placed into the lining

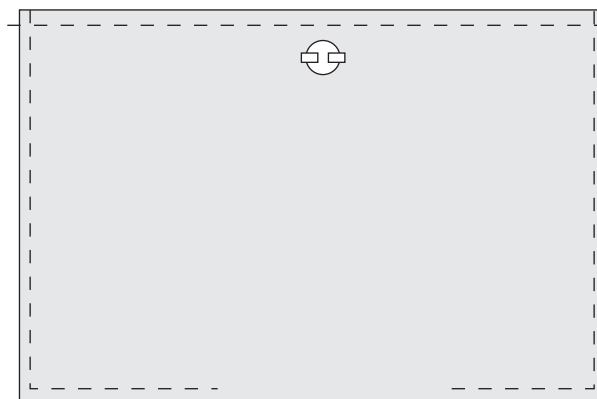

← Sew top edge close.

10. Pull the outer fabric through the opening of the lining at the bottom. Press the lining's bottom seam close and top stitch with a 1/4in seam and then push the lining inside the outer fabric.

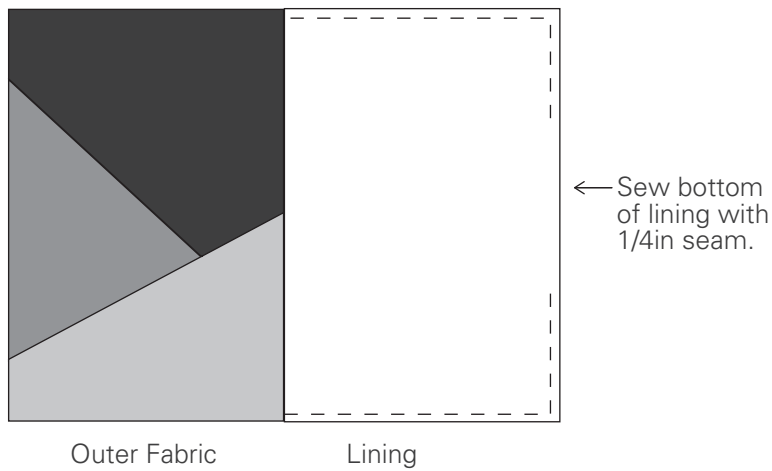

10. Top stitch around the top of the clutch with a decorative stitch. Congrats! Color block clutch is now complete and ready for a night on the town.





A

